

Specifications

Measuring

Technique:	Infrared Gas Cell Correlation Technique
Measuring range:	System Performance 0 - 10000 ppm. m Other ranges selectable from the keypad
Pathlength:	0.5 to 10 m / 1.6 to 32 ft
Measurement cycle:	20 Hz integrated over 2 secs. Model 9100
Linearity:	± 3 % of range
Resolution:	1 ppm
Response time:	Adjustable between 2 and 250 secs.
Calibration :	Calibration audit, Zero calibration (clear stack)

Control Panel

Display:	2 x 16 character reflective backlit LCD with contrast control (receiver unit) signal strength indicator (transmitter unit)
Keypad:	9 keys for data input, diagnostics, setup and calibration

Environmental

Temperature range:	-30 to +55 °C / -22 to 131 °F
Flue gas temperature range:	up to 370 °C / 700 °F
Environmental rating:	IP65

Compliance

Safety:	Conforms to EN61010
EMC:	Conforms to EN50 081 and EN 50 082

Inputs/Outputs

Flue gas temperature input:	Thermocouple, Type K Chromel/Alumel input into the Transmitter unit or 4-20 mA temp. input
Serial interface:	Isolated RS232 or RS485 communications (Modbus) for: CO concentration, Status, Signal strength, Initiate check cycle, Diagnostic data
Current loop (analog) outputs (2): Relay outputs (3):	0, 2, 4 -10, 20mA user configurable for track or hold Independently configurable as System OK, Maintenance, or Alarm (High or low)
Relay rating:	30 V d.c., 1 A

Electrical

Power supply:	85 - 132, 170 - 264 V a.c. (auto selects), 50 - 60 Hz
Power consumption:	200 W

Mechanical Data

Mounting Flange*:	ASA 3", 150 lb flange (supplied)
Dimensions (H x W x D): (Transmitter and Receiver)	264 x 212 x 475 mm / 10.4 x 8.4 x 18.7 in Note: 'D' includes purge
Weight:	9.4 kg / 20.7 lb (Receiver unit) 10.1 kg / 22.2 lb (Transmitter unit)

* Transfer flange available for Model 9100

Options

Air mover assembly for air purge
Air purge blower unit
Transfer/Adaptor Flanges
Flue gas thermocouple with current loop transmitter

combustion

efficiency

monitoring



**Model 9100
carbon monoxide monitoring**

Land has a comprehensive range of Combustion and Environmental Monitoring Instrumentation.

LAND
AMETEK
PROCESS & ANALYTICAL INSTRUMENTS

AMETEK Land • Stubble Lane Dronfield S18 1DJ • England
Email: land.combustion@ametec.co.uk • www.landinst.com • Tel: +44 (0) 1246 417691 • Fax: +44 (0) 1246 410585
AMETEK Land, Inc. • 150 Freepoint Rd • Pittsburgh, PA 15238 • U.S.A.
Email: combsales@ametec.com • www.ametek-land.com • Tel: +1 (412) 826 4444 • Fax: +1 (412) 826 4460
AMETEK Land Asia Pacific • No.43 • Changi South Avenue 2, #04-01 • Singapore 486164
www.landinst.com • Tel: +65 6505 9031 • Fax: +65 6481 6588
For a full list of international offices, please visit www.landinst.com



Applies in the UK



Applies in the USA



LAND
AMETEK
PROCESS & ANALYTICAL INSTRUMENTS

Model 9100

High accuracy, Carbon Monoxide monitor

The Model 9100 Carbon Monoxide Monitor breaks new ground in accuracy, performance and ease-of-use. Built upon the success of the original Series 9000, the Model 9100 have the flexibility to meet all user requirements.


Features and Benefits

- **Direct continuous measurement of Carbon Monoxide** - accurate and repeatable readings
- **True representative measurement** - average reading across entire duct
- **Improved combustion control and efficiency savings** - fast measurement response time
- **Low running and maintenance costs** - long life infrared source
- **High reliability** - robust design, continuous self diagnostics and calibration checking
- **Simple installation** - advanced alignment features
- **Over 20 years of experience in CO monitoring** - 4th generation product

Combustion Efficiency

Incomplete combustion of carbon based fuels, including coal and oil will always result in the formation of Carbon Monoxide (CO). Increased CO concentration equates to insufficient or inefficient combustion. It is not uncommon to have varying boiler loads and fuel quality. The greater the variation the most advantage can be gained by controlling with continuous monitoring of the levels of CO.

The graph illustrates the relationship between CO, Oxygen and minimum heat loss. **The Carbon Monoxide control band is load independent.**

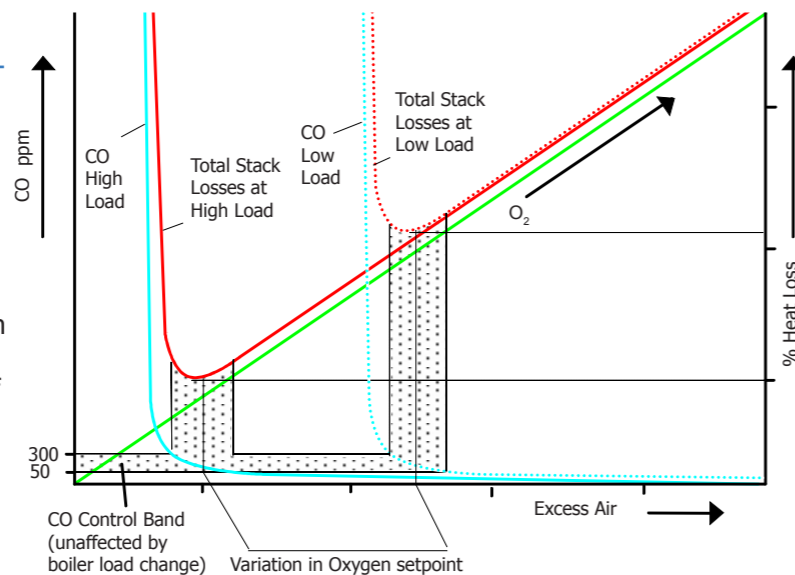


Reducing NOx using CO measurement

NOx emission levels can be optimized by controlling the levels of excess air in the combustion process through continuous CO measurement. Maintaining low levels of CO minimizes NOx emission levels. Close control of excess air levels through CO measurement is vital, as NOx level increases are non-linear.



Key to Schematic

1. Infrared source
2. IP65
3. Gas Cell Wheel
4. Advanced Air Purging System
5. High Sensitivity Infrared Detector
6. Measurement and Calibration Filters
7. User keypad and CO measurement display
8. Signal Strength Indicator

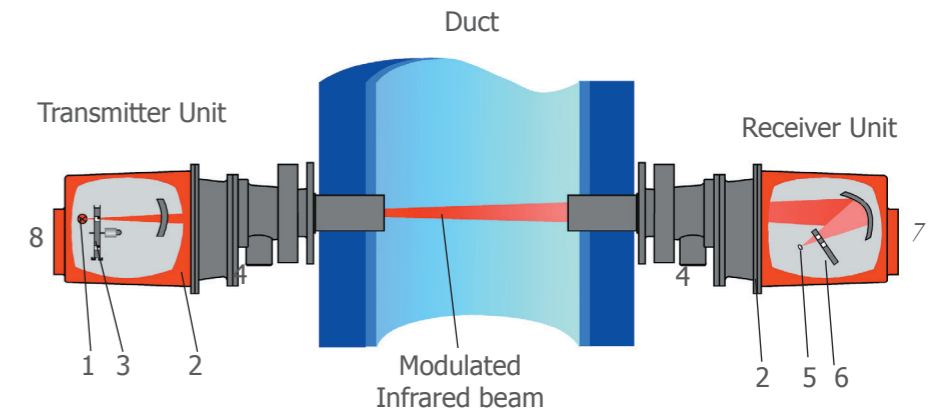

Measurement Principle

Radiation is emitted from an infrared source inside the Transmitter unit. The beam is modulated as it passes successively through measurement and reference gas cells. The beam then crosses the measurement duct containing the CO and is received by the high sensitivity detector. The receiver unit converts the signal into an electrical current and an output signal is generated which corresponds to the CO concentration.



User keypad and CO measurement display

Advantages over a sampling system

The Model 9100 monitors across the entire duct width (not a single sample point) enabling a true, representative measurement of the carbon monoxide levels to be made. Process control demands a fast responding system like the Model 9100. Extractive analyzers are often too slow, due to the sample gas transport time, and inaccurate due to the single sampling point.

Advanced Air Purge

Many CO Monitor installations involve measurement in dirty flue gases. Dirt on the instrument's window results in signal loss and high maintenance requirements. Land Instruments International have solved this problem by using their Advanced Air Purge. This provides a laminar flow of purge air giving full positive pressures and no voids.



Industries

- Power Utilities
- Refineries
- Chemical Plants
- District Heating Plants
- Waste Incinerators
- Cement Plants
- Process Industries
- Pulp & Paper Manufacture

Applications

- Boiler Combustion Efficiency
- Low NOx Burner Performance
- Burner Performance Monitoring
- Process Control
- Precipitator Protection
- Explosion Prevention